


"BUILDING SOLUTIONS FOR THE WORLD"  
 QUALITY APPROVED TO AS/NZS ISO9001

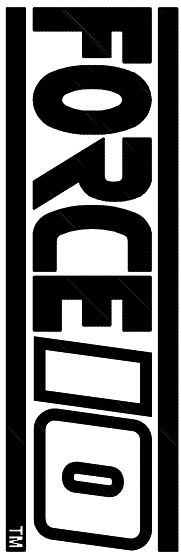

FORCE 10 INTERNATIONAL PTY LTD

63 FACTORY ROAD, OXLEY  
 QUEENSLAND, AUSTRALIA 4075  
 PH. +61 7 33795200 FX. +61 7 33795211  
 email: - reception@force10.com.au

THE FORCE 10 ENGINEERED BUILDING SYSTEM IS PROTECTED BY WORLD-  
 WIDE PATENTS. THIS DRAWING MAY NOT BE COPIED OR REPRODUCED  
 IN PART OR WHOLE WITHOUT WRITTEN CONSENT FROM FORCE 10.

REV	BY	DATE	REV	BY	DATE
1	RUG	14-05-95			
2	AJC	26-06-99			
3	AJC	28-02-01			
4	TD	23-11-05			

<b>A3</b>	<b>SCALE</b> : 1 : 10
<b>CHECKED</b> :	
<b>DATE</b> :	25-3-93
<b>DRAWN BY</b> :	KDA

<b>DETAIL DRAWING NUMBER</b> :	DT 014
<b>REVISION</b> :	4
<b>DETAIL DRAWING TITLE</b> :	TYPICAL SECTION DOUBLE STOREY ON SLAB

ROOFING TO MANUFACTURERS SPECIFICATION  
 FIXED TO TOP HAT PURLIN

STEEL FRAMED ROOF TRUSS TO MANUFACTURERS  
 SPECIFICATIONS @ 20° PITCH (SEE DT008)

20° ANGLE WASHER  
 TRUSS LOCATOR  
 TRUSS FIXING BRACKET

COLORBOND FASCIA  
 AND GUTTER  
 6mm F/C EAVES LINING SHEET  
 40mm CEILING BATTEN  
 42x19mm TIMBER EAVE BATTEN

STEEL FRAMED PANEL  
 6mm F/C SHEET BOTH SIDES  
 POLYURETHANE FILLED CAVITY  
 (SEE DT002 & DT003)

FLASHING TO WALL & FLOOR  
 0.6mm STAINLESS STEEL

BEARER FLASHING  
 0.8mm ZINCALUME

WALL "T" BRACKET

STEEL FRAMED PANEL  
 6mm F/C SHEET BOTH SIDES  
 POLYURETHANE FILLED CAVITY  
 (SEE DT002 & DT003)

FLASHING TO WALL AND SLAB  
 0.6mm STAINLESS STEEL

M12x125 THREADED  
 ROD w/ EPOXY  
 RESIN CAST IN  
 TO DRILLED HOLE

CONCRETE SLAB  
 TO ENGINEERS  
 SPECIFICATIONS TO  
 SUIT INDIVIDUAL  
 HOUSE AND BLOCK  
 CONDITIONS

TOP HAT PURLIN

25mm CEILING BATTEN

10mm GYPROCK TO CEILING

90mm PLASTER CORNICE

68x12mm BULLNOSE  
 TIMBER SKIRTING

22mm PARTICLEBOARD  
 or 18mm COMPRESSED

JOIST  
 179x50 SECTION  
 MATL 1.2mm G300 (UP TO 3m)  
 MATL 1.6mm G450 (FOR 4m)

68x12mm BULLNOSE  
 TIMBER SKIRTING

WALL-FLOOR  
 BRACKET

55

SIGNATURE OF CERTIFYING  
 STRUCTURAL ENGINEER :-  
 .....